


Compound Eye Module

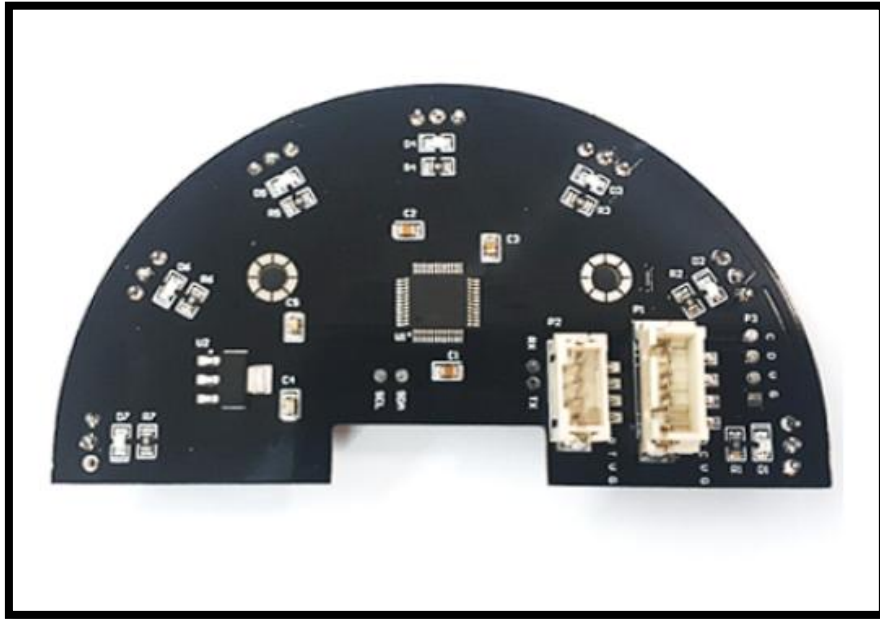

Introduction

The TSSP58038 Compound Eye Module is a specialized 38 kHz infrared (IR) detection array designed specifically for tracking IR-emitting targets such as the RCJ-05r IR ball. Equipped with seven onboard Vishay TSSP58038 IR sensors arranged in a compound configuration, a single module provides a wide 180° field of view divided into seven discrete directional sectors. By mounting two modules back-to-back, the system achieves complete 360° omnidirectional coverage for full-range target localization.

Features

7-Channel IR Detection Array: Equipped with 7 Vishay TSSP58038 infrared sensors per module for a 180° directional detection field.

Dual-Module 360° Operation: Connect two modules in Double Mode to achieve complete 360° omnidirectional target tracking.

Onboard Power Management: Powered by 5V DC with an onboard 1117 low-dropout (LDO) voltage regulator delivering stable power to the embedded MCU and sensor array.

Embedded Processing: Integrated STM32L051 microcontroller handles real-time IR signal processing, angle calculation, and protocol management.

Flexible Communication Architectue: Single mode and dual mode


Specifications

Power supply voltage	: 4.5 ~ 5.5V DC
Operating current	: ~ 0.2mA
Operating temperature	: -25 ~ 85°C
Operating Humidity	: <90%
Weight	: 16.4g
Interface	: I ² C Standard-mode 7-bits address 0x13
Size	: 90x25 mm
Detect distance	: 0 ~ 80 cm (recommend usage range)
Maximum distance	: ~ 2m

Communication Bus Interface I²C and Its Address

The module operates as an I²C Target(Slave) device, esponding to commands transmitted by the host Controller (Master) over a 2-wire serial bus interface. The interface is fully compliant with the standard NXP I²C-Bus Specification (Document No. 9398 393 40011).

Dimensions

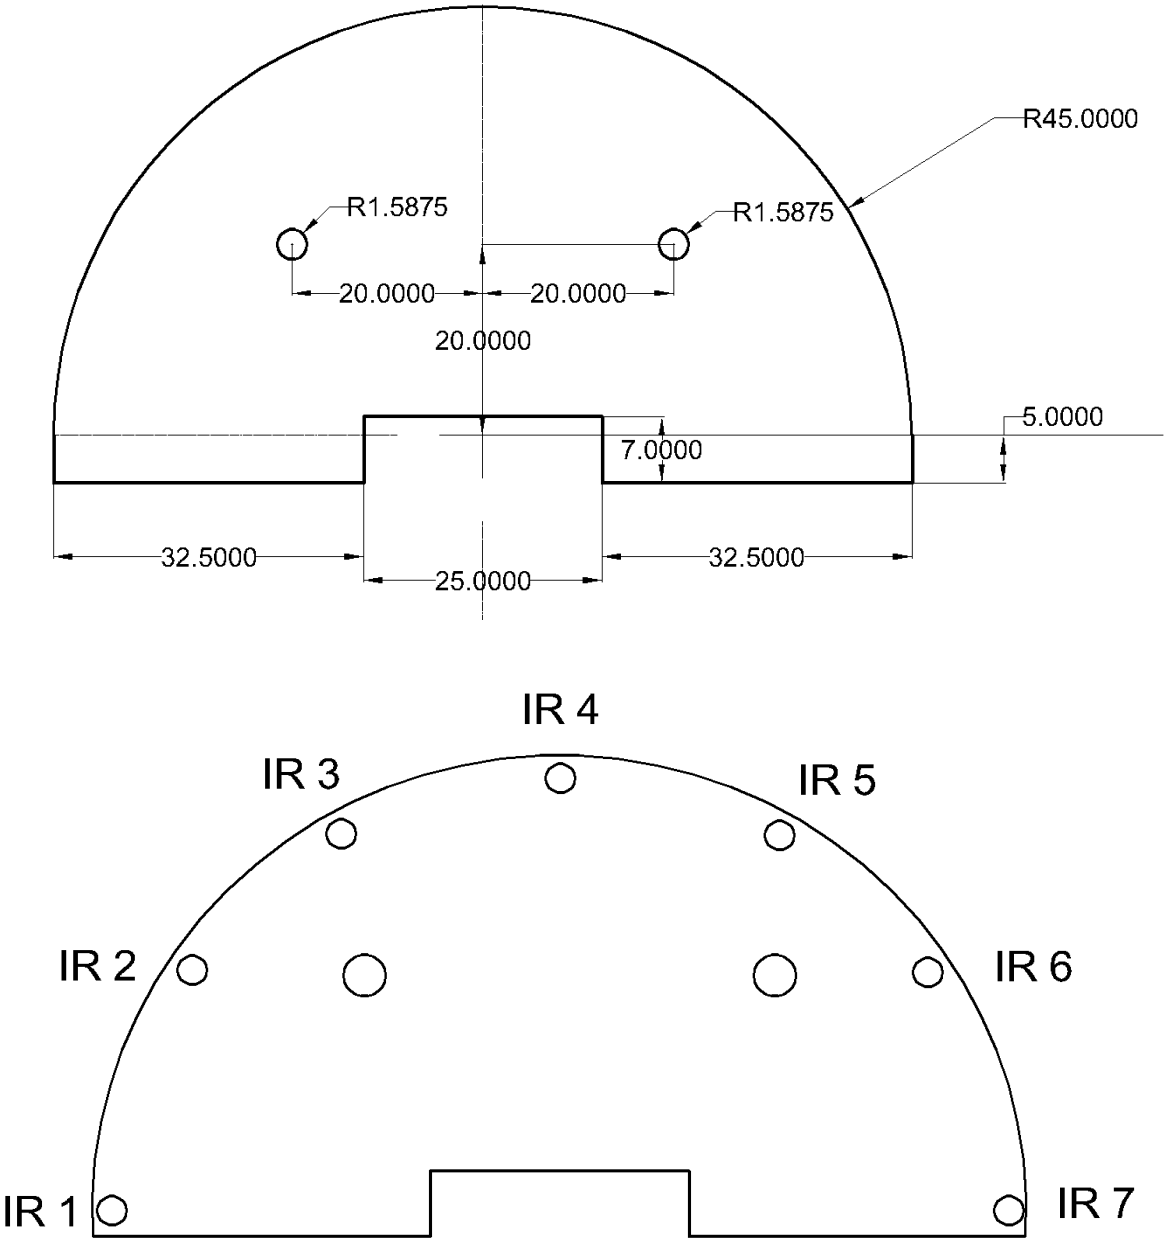

Product Parameters

Mechanical and Technical Specifications:

Parameter	Specification	Unit/ Condition
Dimensions	90 x 50 x 18.8	mm
Weight	16.4	g
Communication Interface	I ² C Standard-Mode(100kHz) I ² C Fast-Mode (400kHz)	7-bit Slave Address

I²C Register/ Command Map


Register	Command Name	Description	Output Data Range
0x00	IR1_Reading	Intensity reading of IR Sensor 1	0-255
0x01	IR2_Reading	Intensity reading of IR Sensor 2	0-255
0x02	IR3_Reading	Intensity reading of IR Sensor 3	0-255
0x03	IR4_Reading	Intensity reading of IR Sensor 4	0-255
0x04	IR5_Reading	Intensity reading of IR Sensor 5	0-255
0x05	IR6_Reading	Intensity reading of IR Sensor 6	0-255
0x06	IR7_Reading	Intensity reading of IR Sensor 7	0-255
0x07	IR8_Reading	Intensity reading of IR Sensor 8	0-255
0x08	IR9_Reading	Intensity reading of IR Sensor 9	0-255
0x09	IR10_Reading	Intensity reading of IR Sensor 10	0-255
0x0A	IR11_Reading	Intensity reading of IR Sensor 11	0-255
0x0B	IR12_Reading	Intensity reading of IR Sensor 12	0-255
0x0C	MAX_IR_Reading	Highest signal intensity across all active IR sensors	0-255
0x0D	MAX_IR_NUM	ID number of the IR sensor detecting maximum signal strength	1-12
0x0E	Angle	Estimated angular direction of detected IR signal	0° – 359°
0x0F	Mode	Operating mode status	0: Single 1: Dual

Application

Designed for seamless integration with Peanut King Solution Limited expansion shields, including the Peanut King Pila V4 Mega Shield and micro:bit Shield V2.1.


Single Mode:

Use a 4-pin XH2.54 cable to establish an I²C communication link between the module and the host expansion shield's onboard I²C header.

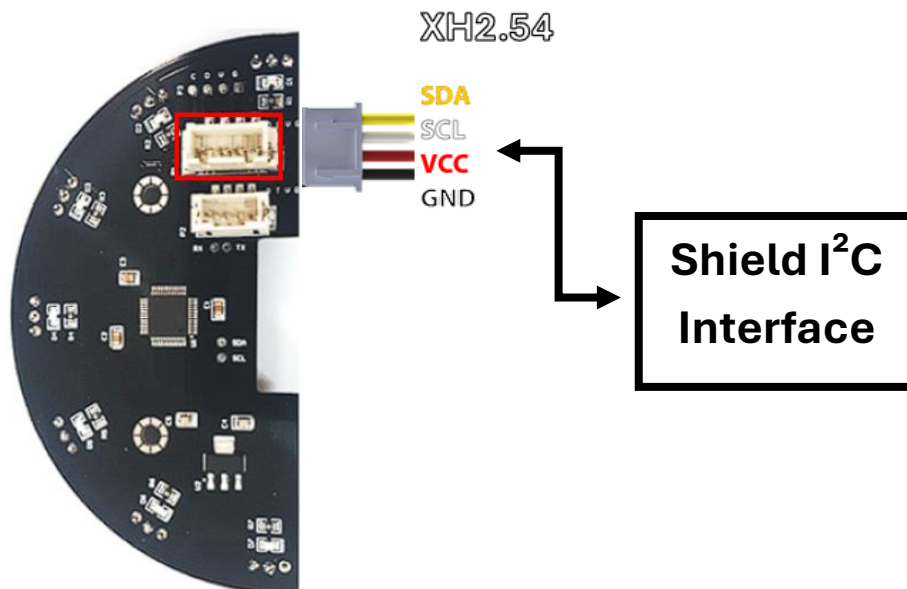

Dual Mode:


Connect the modules via 4-pin PH2.0 cable using standard TX-to-RX and RX-to-TX cross-over topology. Then connect one module directly to the expansion shield's I²C port to integrate the dual-module system into the host I²C bus.

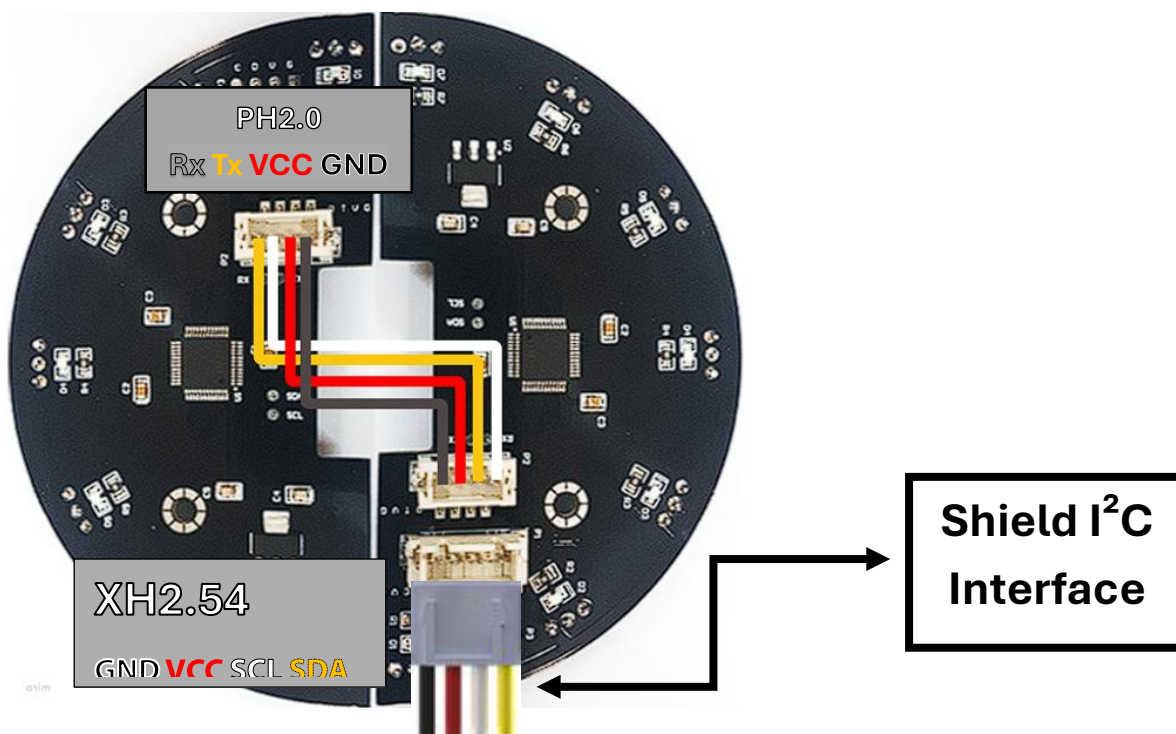


Application

Peanut KING PILA V4.2 Shield:

Install the library in “Library Manager”

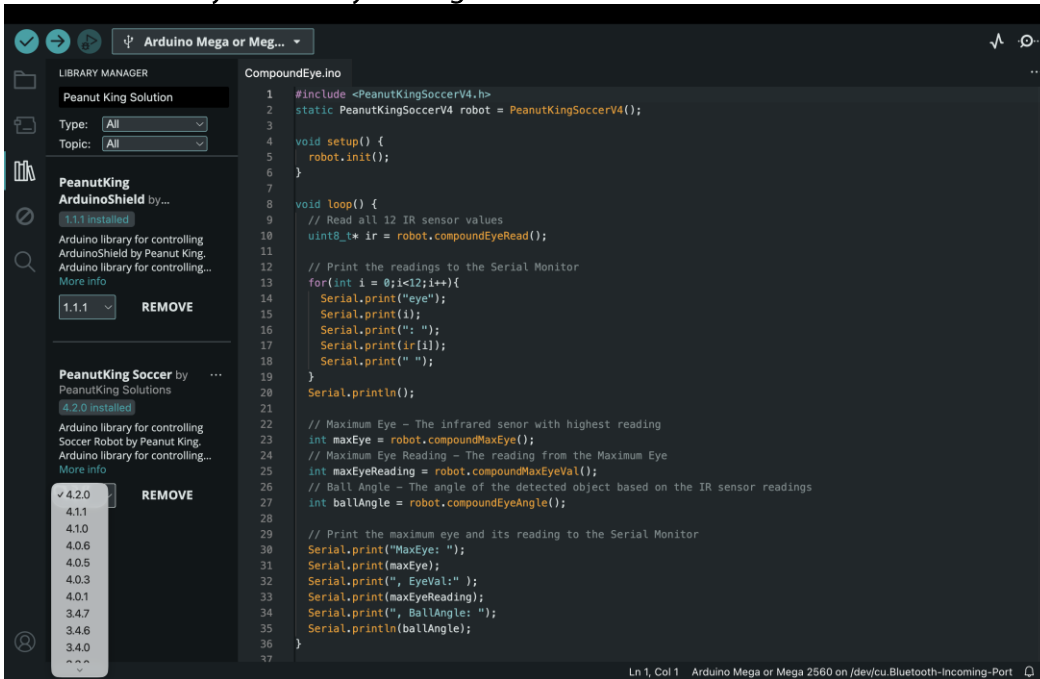

In File → Examples → PeanutKing Soccer → Version4 → CompoundEye
Open the sample code

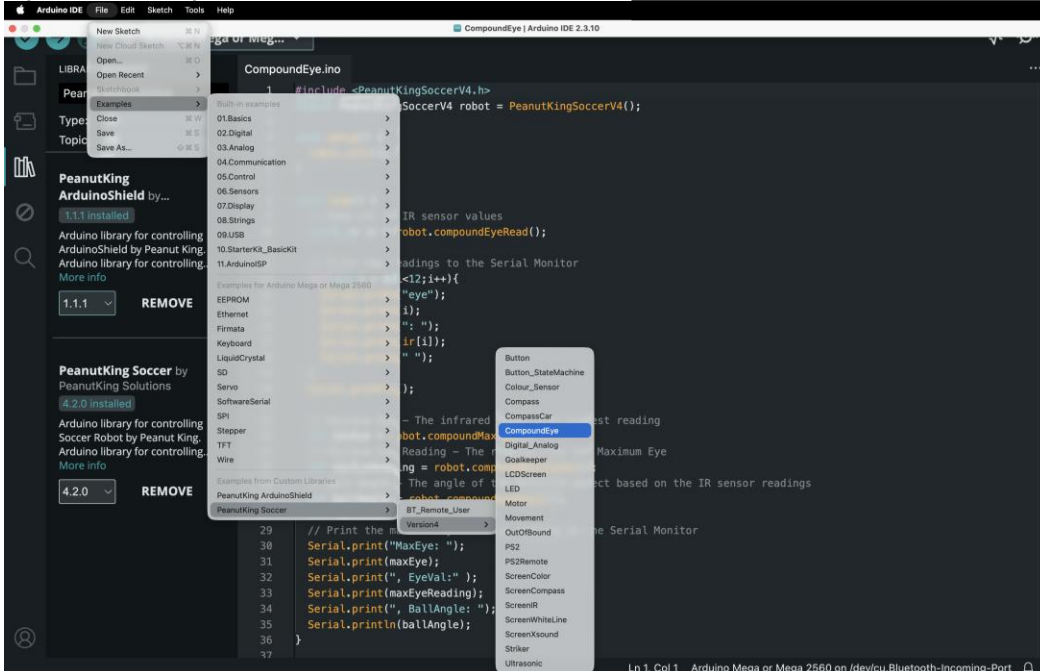

Application

```
#include <PeanutKingSoccerV4.h>
static PeanutKingSoccerV4 robot = PeanutKingSoccerV4();

void setup() {
    robot.init();
}

void loop() {
    // Read all 12 IR sensor values
    uint8_t* ir = robot.compoundEyeRead();

    // Print the readings to the Serial Monitor
    for(int i = 0; i < 12; i++){
        Serial.print("eye");
        Serial.print(i);
        Serial.print(": ");
        Serial.print(ir[i]);
        Serial.print(" ");
    }
    Serial.println();

    // Maximum Eye - The infrared sensor with highest reading
    int maxEye = robot.compoundMaxEye();
    // Maximum Eye Reading - The reading from the Maximum Eye
    int maxEyeReading = robot.compoundMaxEyeVal();
    // Ball Angle - The angle of the detected object based on the IR sensor readings
    int ballAngle = robot.compoundEyeAngle();

    // Print the maximum eye and its reading to the Serial Monitor
    Serial.print("MaxEye: ");
    Serial.print(maxEye);
    Serial.print(", EyeVal: ");
    Serial.print(maxEyeReading);
    Serial.print(", BallAngle: ");
    Serial.println(ballAngle);
}
```

Important Information and Disclaimer

The information in this statement reflects Peanut King Solution Limited's knowledge and belief as of the date it is provided. Peanut King Solution Limited relies on information from third parties and does not guarantee its accuracy. Efforts are ongoing to better integrate third-party information. Peanut King Solution Limited has taken and continues to take reasonable steps to provide accurate and representative information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. Certain information is considered proprietary by Peanut King Solution Limited and its suppliers, so CAS numbers and other limited information may not be available for release.

NOTICE

Peanut King Solution Limited reserves the right to make changes to the products in this document to improve performance or for any other reason, or to discontinue them without notice. Customers should contact Peanut King Solution Limited for the latest product information before placing orders or designing Peanut King Solution Limited products into systems. Peanut King Solution Limited assumes no responsibility for the use of any products or circuits described in this document or customer product design, does not convey any license under any patent or other right, and does not guarantee that the circuits are free of patent infringement. Peanut King Solution Limited makes no claim regarding the suitability of its products for any particular purpose and assumes no liability arising from the use of any product or circuit, specifically disclaiming any and all liability, including consequential or incidental damages.

PEANUT KING SOLUTION LIMITED PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN CRITICAL APPLICATIONS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY OR DEATH. THE USE OF PEANUT KING SOLUTION LIMITED PRODUCTS IN LIFE SUPPORT SYSTEMS IS NOT AUTHORIZED.